
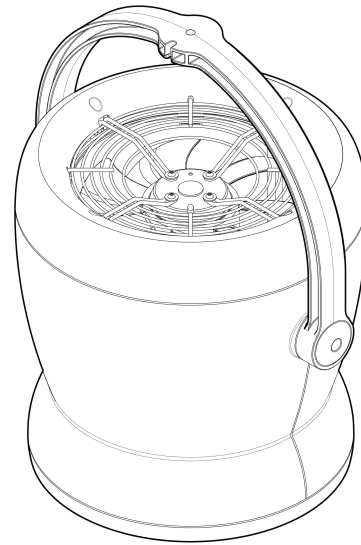


DATE: \_\_\_\_\_

PROJECT: \_\_\_\_\_

LOCATION: \_\_\_\_\_

Destratification Fan/Air Circulator  
Ceiling Mounted

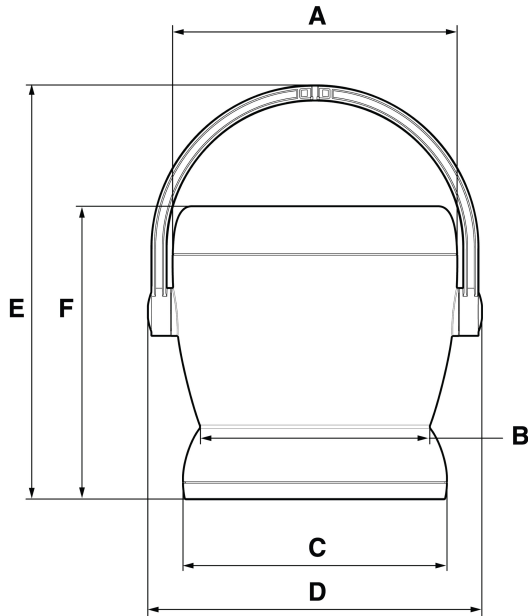

### DIMENSION DATA

Model	A	B	C	D	E	F	Ship Wt.
H30	14-1/8	12	13-7/8	17-1/2	21-7/16	14-3/4	14-3/4
H60	17-13/16	14-7/16	16-9/16	21	25-13/16	18-1/8	19-3/4

ALL DIMENSIONS IN INCHES. WEIGHTS IN LBS.

### STANDARD CONSTRUCTION FEATURES

High efficiency, high volume, low noise destratification fan with seven Owllet curved blades contained within fire-resistant ABS plastic housing protected by steel wire guard. Four pole externally wound motor with power rating of 120V 60Hz. Moisture and hot climate protection. Fan operated by an included 120V 60Hz variable speed control with RFI line filter.

	QTY	MARK
H-30		
H-60		