

PERFORMANCE DATA




H25-EC
High Efficiency
For Open Ceilings Up To 25ft

FAN SPECIFICATIONS

Test results for H25-EC High Efficiency Fan with the 208-277V EC motor with guard grille on inlet.

- H25-EC Electronically Commutated Motor
- 208-277V 50Hz/60Hz, 57 watts, 0.5A
- 2150 RPM
- Finger Guard Grille on inlet side and Air Guide on outlet side

Test results were measured in accordance to DIN 24163, EN ISO 3745

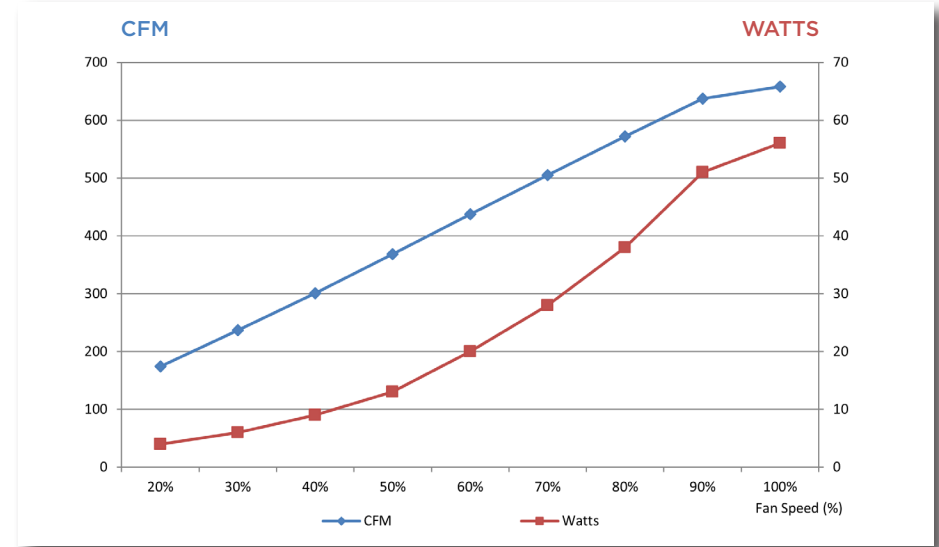

DATA TABLE

Fan Speed	Control Signal (V)	Power (V)	CFM	RPM	Watts	Amps	Sound Power (LwA6)
100%	10	211	658	2160	56.1	0.54	68
90%	9	211	637	2102	50.9	0.49	67
80%	8	211	572	1885	38.3	0.38	64
70%	7	211	505	1665	27.9	0.29	61
60%	6	211	437	1440	19.7	0.22	57
50%	5	211	368	1213	13.2	0.16	53
40%	4	211	301	994	8.8	0.12	47
30%	3	211	237	782	5.8	0.09	42
20%	2	211	174	575	3.7	0.07	38



DuctSox Corporation
4343 Chavenelle Road
Dubuque, IA 52002

zoofans.com
Phone: 303-557-1852
Toll Free: 855-966-3267

