

# PERFORMANCE DATA




**H25-EC**  
High Efficiency  
For Open Ceilings Up To 25ft

## FAN SPECIFICATIONS

Test results for H25-EC High Efficiency Fan with the 208V-277V EC motor with guard grille on inlet.

- H25-EC Electronically Commutated Motor
- 230V 50Hz/60Hz, 57 watts, 0.5A
- 2150 RPM
- Finger Guard Grille on inlet side and Air Guide on outlet side

Test results were measured in accordance to DIN 24163, EN ISO 3745

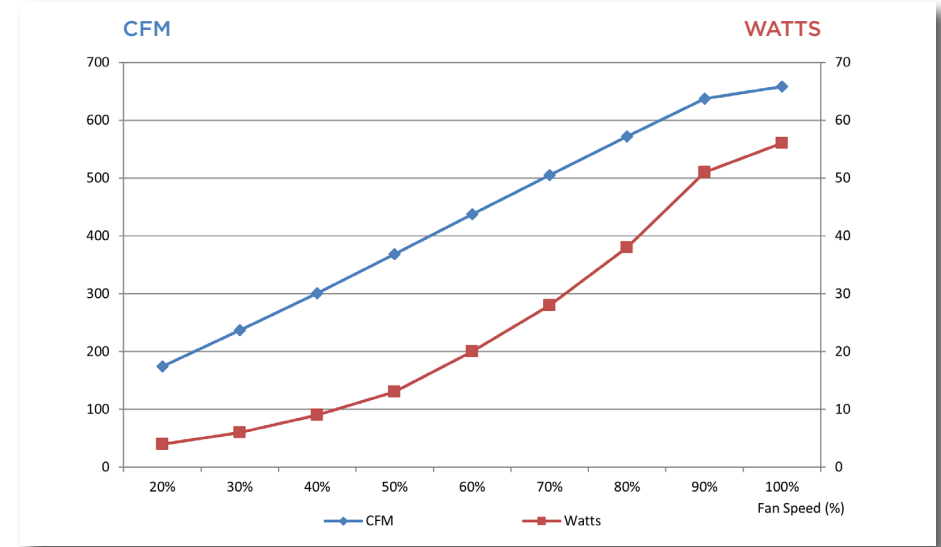

## DATA TABLE

Fan Speed	Control Signal (V)	Power (V)	CFM	RPM	Watts	Amps	Sound Power (LwA6)
<b>100%</b>	10	211	658	2160	56.1	0.54	68
<b>90%</b>	9	211	637	2102	50.9	0.49	67
<b>80%</b>	8	211	572	1885	38.3	0.38	64
<b>70%</b>	7	211	505	1665	27.9	0.29	61
<b>60%</b>	6	211	437	1440	19.7	0.22	57
<b>50%</b>	5	211	368	1213	13.2	0.16	53
<b>40%</b>	4	211	301	994	8.8	0.12	47
<b>30%</b>	3	211	237	782	5.8	0.09	42
<b>20%</b>	2	211	174	575	3.7	0.07	38