


PERFORMANCE DATA







JVEC-LP
Low Profile
Smart Garage Ventilation Fan

FAN SPECIFICATIONS

Test results for JVEC-LP EC High Efficiency Fan with the 380V - 480V EC direct drive motor with safety grille on inlet.

- JVEC-LP Electronically Commutated Motor
- 380V - 480V 50Hz/60Hz, 170 watts, 2.6A
- 1770 RPM
- Finger Guard Grille on inlet side and Air Guide on outlet side

Test results were measured in accordance to DIN 24163, EN ISO 13347-3

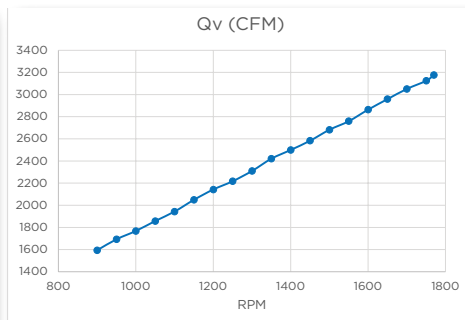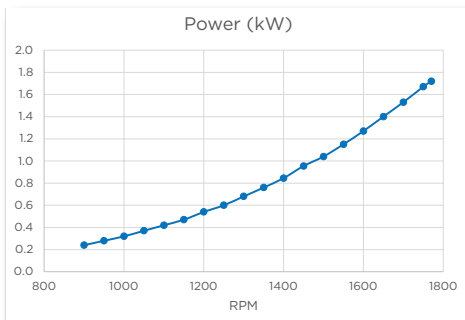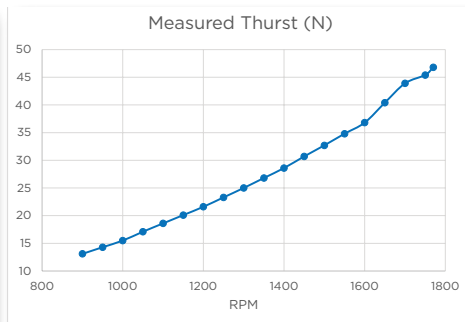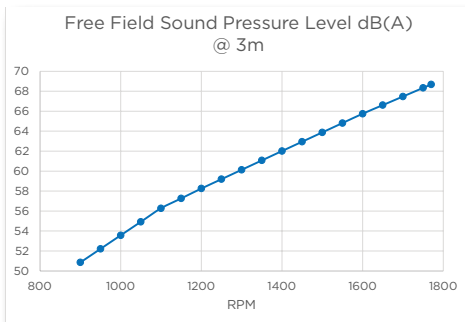

DATA TABLE

RPM	CFM	Velocity (m/s)	Thrust (N)	Power (kW)	Amps	Sound Pressure (dB(A) @ 3m)
1770	3176	23.1	46.8	1.7	2.6	68.7
1750	3125	22.8	45.4	1.7	2.5	68.3
1700	3051	22.2	43.9	1.5	2.3	67.5
1650	2959	21.5	40.4	1.4	2.1	66.6
1600	2864	20.9	36.8	1.3	1.9	65.8
1550	2760	20.1	34.8	1.2	1.7	64.8
1500	2682	19.5	32.7	1.0	1.6	63.9
1450	2583	18.8	30.7	1.0	1.5	63.0
1400	2500	18.2	28.6	0.9	1.3	62.0
1350	2420	17.6	26.8	0.8	1.2	61.1
1300	2310	16.8	25	0.7	1.1	60.1
1250	2217	16.1	23.3	0.6	1.0	59.2
1200	2142	15.6	21.6	0.5	0.9	58.3
1150	2049	14.9	20.1	0.5	0.8	57.3
1100	1943	14.2	18.6	0.4	0.8	56.3
1050	1857	13.5	17.1	0.4	0.7	54.9
1000	1768	12.9	15.5	0.3	0.6	53.6
950	1692	12.3	14.3	0.3	0.6	52.2
900	1593	11.6	13.1	0.2	0.5	50.9